

Contact wheels




Contact wheel made of flexible PU foam and soft foam, cushion over 20 mm

Ventiflex® HH

cushion height of over 20 mm. Due to an alternating arrangement of PU and soft foam slats (each 10 mm thick), further increased elasticity is guaranteed. Particularly suitable for highly profiled parts and the use of "J" belts.

For use with which machine:

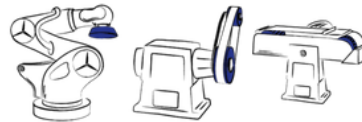

Here you will find general information about contact wheels and storage information for contact wheels.

Category: Contact wheels with running cushion made of foam slats

Tags: Belt sanders, Dry sanding, Fine tuning, Grinding with robots, J and J-Flex belts, Large belt sanders

Hardness Shore A														
23	28	35	40	45	48	50	60	65	70	80	83	90	92	96

Dimension							
∅ (mm)	RPM	Width (mm)					
		30	50	75	100	125	150
100	6800	x	x	x	x	x	x
150	4500	x	x	x	x	x	x
200	3400	x	x	x	x	x	x
250	2800	x	x	x	x	x	x
300	2300	x	x	x	x	x	x
350	2000	x	x	x	x	x	x
400	1750	x	x	x	x	x	x
450	1540	x	x	x	x	x	x